




Models	Nr. 45420 4 40
	Nr. 45420 3 40
Dimensions	H 52 mm
	W 99 mm
	L 1502 mm

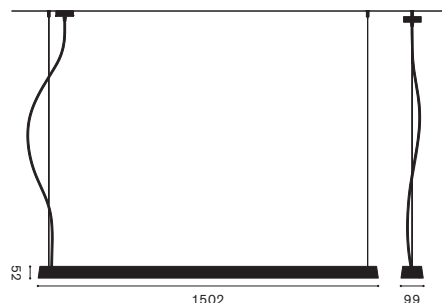

Contents

Controller
Power requirements
Power input
Standby
Light distribution

Energy class lamp
Luminous efficiency
Colour rendition index
Light colour

Glare suppression

Materials

Cover of illuminant
Weight

Power cable
Protection rating
Test marks
Warranty

Particularities
Note

LED

Premium converter
220–240V, 50–60Hz
41 W
< 0.5 W
67% direct, 33% indirect


A++
5001 lm
CRI Ra > 82
Neutral white 4000 K, Nr. 45410 4 40
Warm white 3000 K, Nr. 45410 3 40
UGR < 16

Brim of illumination head made of steel,
white powder-coated
Structured acrylic glass
4 kg

3 m, 5-polig
IP 20
ENEC TÜV SÜD, CE, ROHS
2 years, 5 years on LED and converter

– With motion detector and constant light control
(3000 K ca. 5 lm/W less than at 4000 K)

Light intensity distribution

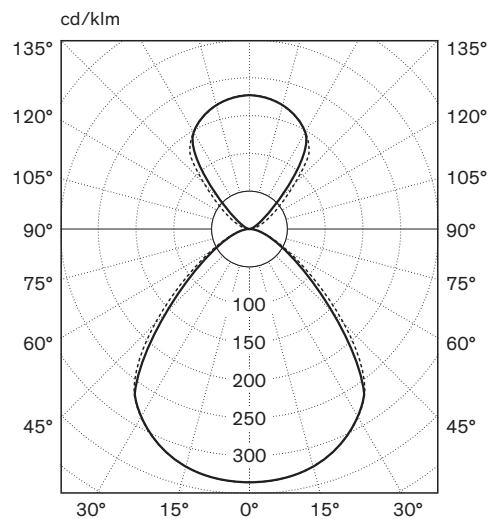

— Lateral light intensity distribution
- - - Frontal light intensity distribution