




Models
Nr. 39161 4 97
Nr. 39161 3 97

Dimensions
H 1975 mm
W 408 mm
L 642 mm

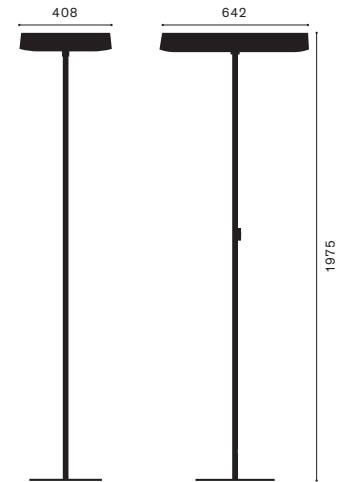

Contents	LED
Controller	Premium converter
Power requirements	220–240 V, 50 Hz
Power input	132 W
Standby	0.5 W
Light distribution	30% direct, 70% indirect
Energy class lamp	A+
Luminous efficiency	15462 lm
Colour rendition index	CRI Ra > 83
Light colour	Neutral white 4000 K, Nr. 39161 4 97 Warm white 3000 K, Nr. 39161 3 97
Glare suppression	UGR < 12
Operation	DALI direct and indirect light can be individually switched and dimmed, with a motion and an ambient light sensor
Materials	Lampshade and wallcase in steel, powder-coated
Weight	19.8 kg
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– For 2 to 4 workplaces – Double taster – Optional with daylight sensor
Note	(3000 K ca. 5 lm/W less than at 4000 K)

Light intensity distribution

