





Models	Nr. 44710 4 45 Nr. 44710 3 45
Dimensions	H 57 mm W 99 mm L 1205 mm



Contents	LED
Controller	Premium converter, DALI
Power requirements	220–240 V, 50–60 Hz
Power input	45 W
Standby	< 0.5 W
Light distribution	100% direct
Energy class lamp	A++
Luminous efficiency	5619 lm
Colour rendition index	CRI Ra > 83
Light colour	Neutral white 4000 K, Nr. 44710 4 45 Warm white 3000 K, Nr. 44710 3 45
Glare suppression	UGR < 19
Operation	Dimmable with DALI
Materials	Brim of illumination head made of steel, powder-coated Structured acrylic glass
Cover of illuminant	Included in the luminaire head
Operating device	4.2 kg
Weight	
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Note	(3000 K ca. 5 lm/W less than at 4000 K)

Light intensity distribution
cd / klm

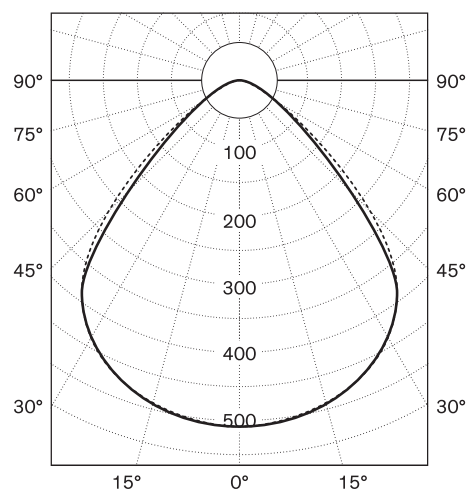

— Lateral light intensity distribution
- - - Frontal light intensity distribution