




Models	Nr. 38021 4 60 Nr. 38021 3 60
Dimensions	H 1915 mm W 373 mm L 480 mm

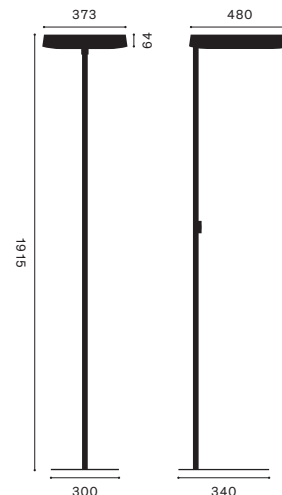

Contents	LED
Controller	Premium converter
Power requirements	220–240 V, 50–60 Hz
Power input	59 W
Standby	< 0.5 W
Light distribution	37% direct, 63% indirect
Energy class lamp	A++
Luminous efficiency	7660 lm
Colour rendition index	CRI Ra > 82
Light colour	Neutral white 4000 K, Nr. 38021 4 60 Warm white 3000 K, Nr. 38021 3 60
Glare suppression	Structured acrylic glass, UGR < 12
Operation	Multi-function button for switching on and off, dimming, setting the light level
Materials	Tube, floor plate and brim of illumination head made of steel, push-button case made of white powder-coated aluminium
Cover of illuminant	Structured acrylic glass
Floor plate	Rectangular, glider included 9 mm high
Weight	13 kg
Power cable	Approx. 3 m, with power plug CH, No. XXXX1 X XX or power plug CEE 7/VII, No. XXXX2 X XX
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– Only consists of 3 components and 2 screws – Easy lamp assembly – LED modules according to Zhaga standards – Minergie® certificate – Motion sensor, daylight sensor (3000 K ca. 5 lm/W less than at 4000 K)
Note	

Light intensity distribution

