




Models	Nr. 45810 4 50 Nr. 45810 3 50
Dimensions	H 57 mm W 99 mm L 1502 mm



Contents

Controller
Power requirements
Power input
Standby
Light distribution

Energy class lamp
Luminous efficiency
Colour rendition index
Light colour

Glare suppression
Operation

Materials

Cover of illuminant
Operating device
Weight

Protection rating
Test marks
Warranty

Particularities

Note

LED

Premium converter, DALI
220–240 V, 50–60 Hz
52 W
< 0.5 W
100% direct

A+
5876 lm
CRI Ra > 84
Neutral white 4000 K, Nr. 45810 4 50
Warm white 3000 K, Nr. 45810 3 50
UGR < 19
Dimmable with DALI


Brim of illumination head made of steel,
powder-coated
Structured acrylic glass
Included in the luminaire head
4.2 kg

IP 20
ENEC TÜV SÜD, CE, ROHS
2 years, 5 years on LED and converter

2 row Bat Wing, with anti-glare panel

(3000 K ca. 5 lm/W less than at 4000 K)

Light intensity distribution cd / klm

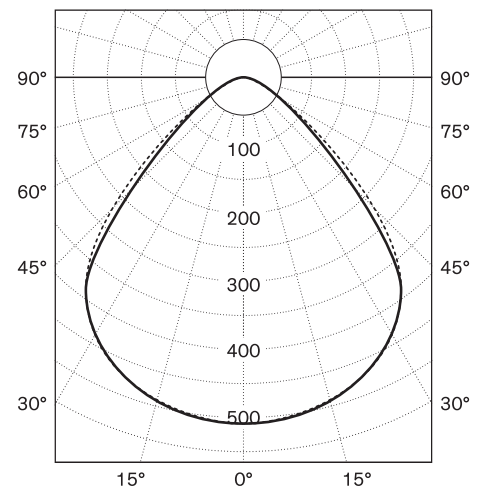

— Lateral light intensity distribution
..... Frontal light intensity distribution