




Models	Nr. 45410 4 80
	Nr. 45410 3 80
Dimensions	H 52 mm
	W 99 mm
	L 1502 mm

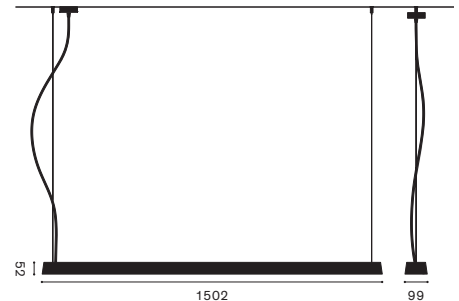

Contents

Controller
Power requirements
Power input
Standby
Light distribution

Energy class lamp
Luminous efficiency
Colour rendition index
Light colour

Glare suppression

Materials

Cover of illuminant
Weight

Power cable
Protection rating
Test marks
Warranty

Particularities

Note

LED

Premium converter, DALI
220–240 V, 50–60 Hz
82 W
< 0.5 W
67% direct, 33% indirect

A++
9784 lm
CRI Ra > 82
Neutral white 4000 K, Nr. 45410 4 80
Warm white 3000 K, Nr. 45410 3 80
UGR < 18

Brim of illumination head made of steel,
powder-coated
Structured acrylic glass
ca. 4.3 kg

3 m, 5-polig
IP 20
ENEC TÜV SÜD, CE, ROHS
2 years, 5 years on LED and converter

– Optionally with daylight sensor and presence
detector
(3000 K ca. 5 lm/W less than at 4000 K)

Light intensity distribution

