




Model	Nr. 51210 4 48	
	Nr. 51210 3 48	
Dimensions	H	52 mm
	W	126 mm
	L	932 mm

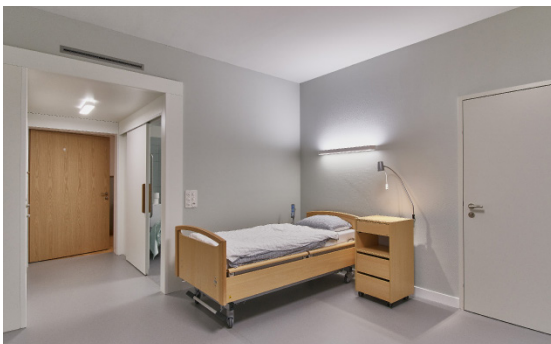

Contents	LED
Controller	Premium converter
Power requirements	220–240 V, 50 Hz
Power input	46 W
Standby	0.5 W
Light distribution	23% direct, 77% indirect
Energy efficiency	This product contains light sources of energy efficiency class c
High durability	72,000 hours
Luminous efficiency	5027 lm
Colour rendition index	CRI Ra > 90
Light colour	Neutral white 4000 K (Nr. 51210 4 48) Warm white 3000 K (Nr. 51210 3 48)
Glare suppression	Opal panel indirect, de-glaring prism with opal film, UGR < 16
Operation	DALI direct and indirect light can be individually switched and dimmed
Materials	Lampshade in steel, white powder-coated
Cover of illuminant	Acrylic glass
Wallcase	Contains driver
Weight	ca. 4.4 kg
Protection rating	IP 43
Test marks	ENEC TÜV SÜD, CE, ROHS, EN 60598–2–25
Warranty	2 years, 5 years on LED and converter
Particularities	– LED modules according to Zhaga standards – Optional with night light 2 W

Light intensity distribution

