




Model	Nr. 52210 4 96 Nr. 52210 3 96	
Dimensions	H	52 mm
	B	126 mm
	L	1214 mm

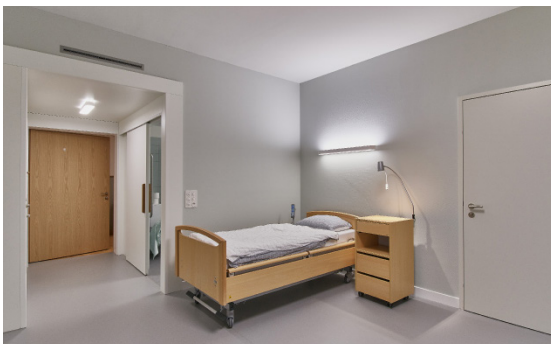

Contents	LED
Controller	Premium converter
Power requirements	220–240 V, 50 Hz
Power input	108 W
Standby	0.5 W
Light distribution	14% direct, 86% indirect
Energy efficiency	This product contains light sources of energy efficiency class c
High durability	72,000 hours
Luminous efficiency	10519 lm
Colour rendition index	CRI Ra > 90
Light colour	Neutral white 4000 K (Nr. 52210 4 96) Warm white 3000 K (Nr. 52210 3 96)
Glare suppression	Opal panel indirect, de-glaring prism with opal film, UGR < 15
Operation	DALI direct and indirect light can be individually switched and dimmed
Materials	Lampshade in steel, white powder-coated
Cover of illuminant	Acrylic glass
Wallcase	Contains driver
Weight	ca. 5.5 kg
Protection rating	IP 43
Test marks	ENEC TÜV SÜD, CE, ROHS, EN 60598–2–25
Warranty	2 years, 5 years on LED and converter
Particularities	– LED modules according to Zhaga standards – Optional with night light 2 W
Note	(3000 K ca. 10 lm/W less than 4000 K)

Light intensity distribution

