




Models	Nr. 47710 4 35 Nr. 47710 3 35
Dimensions	Ø 396 mm H 57 mm



Contents	LED
Controller	ECO converter
Power requirements	220–240 V, 50 Hz
Power input	32 W
Standby	0.5 W
Light distribution	100% direct
Energy efficiency	This product contains a light source of energy efficiency class c
Luminous efficiency	3168 lm
Colour rendition index	CRI Ra > 83
Light colour	Neutral white 4000 K, Nr. 47710 4 35 Warm white 3000 K, Nr. 47710 3 35
Glare suppression	Structured acrylic glass, UGR < 19
Operation	DALI directly dimmable
Materials	Lampshade in steel, powder-coated
Cover of illuminant	Structured acrylic glass
Wallcase	Contains driver
Weight	ca. 2.8 kg
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– LED modules according to Zhaga standards – Optionally with daylight sensor and presence detector
Note	(3000 K ca. 10 lm/W less than 4000 K)

Light intensity distribution

cd/klm

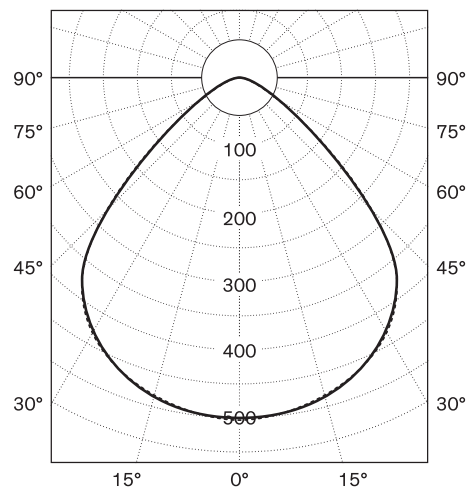

— Lateral light intensity distribution
- - - - Frontal light intensity distribution