




Models	Nr. 506 16 4 95 Nr. 506 16 3 95
Dimensions	Ø 598 mm H 1915 mm

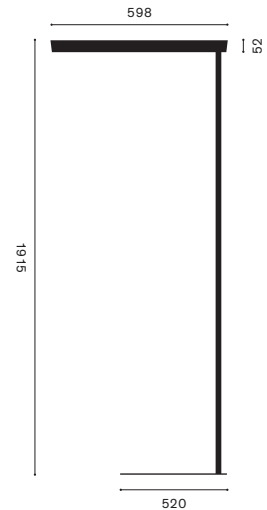

Contents	LED
Controller	Premium converter
Power requirements	220–240 V, 50 Hz
Power input	117 W
Standby	0.5 W
Light distribution	47,5% direct, 53,5% indirect
Energy efficiency	This product contains light sources of energy class c
High durability	72,000 hours
Luminous efficiency	18703 lm
Colour rendition index	CRI Ra > 94
Light colour	Neutral white 4000 K, Nr. 506 16 4 95 Warm white 3000 K, Nr. 506 16 3 95
Glare suppression	Structured acrylic glass, UGR < 17*
Operation	Can be dimmed by a key button or DALI
Materials	Tube, floor plate and lampshade in metal, powder-coated
Cover of illuminant	Structured acrylic glass
Wallcase	Contains driver
Weight	ca. 19.5 kg
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– eccentric position of the lamp tube – optional with a motion and daylight sensor
Note	Reflectancies of ceiling/wall/floor 0.7/0.5/0.2, room dimensions x = 4H, y = 8H (3000 K ca. 10 lm/W less than 4000 K)

Light intensity distribution

