





Model Nr. 46010 4 20  
Nr. 46010 3 20

Dimensions Ø 300 mm  
H 493 mm



Contents	LED
Controller	ECO converter
Power requirements	220–240 V, 50 Hz
Power input	23 W
Standby	0.5 W
Light distribution	51% direct, 49% indirect
Energy efficiency	This product contains light sources of energy efficiency class c
Luminous efficiency	2290 lm
Colour rendition index	CRI Ra > 82
Light colour	Neutral white 4000 K, Nr. 46010 4 20 Warm white 3000 K, Nr. 46010 3 20
Glare suppression	Structured acrylic glass, UGR < 14
Operation	Can be dimmed by a key button
Materials	Tube, floor plate and lampshade in steel, powder-coated
Cover of illuminant	Structured acrylic glass
Wallcase	Contains driver
Weight	ca. 4 kg
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– LED modules according to Zhaga standards
Note	(3000 K ca. 10 lm/W less than 4000 K)

Light intensity distribution

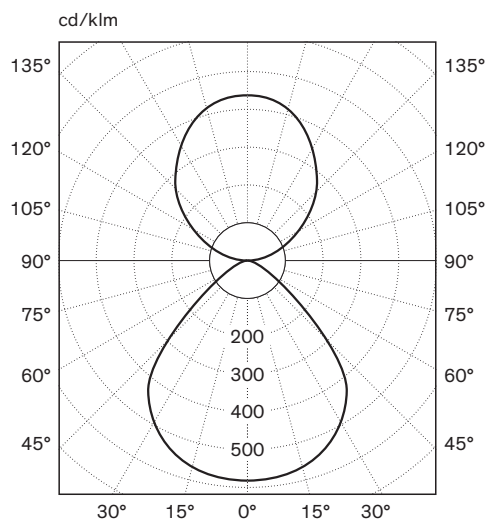

— Lateral light intensity distribution  
 ..... Frontal light intensity distribution