





Models Nr. 47410 4 30
Nr. 47410 3 30

Dimensions Ø 396 mm
H 52 mm

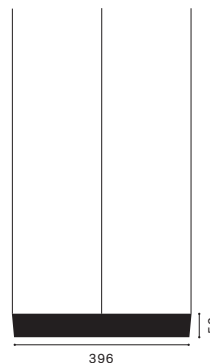

Contents	LED
Controller	ECO converter
Power requirements	220–240 V, 50 Hz
Power input	34 W
Standby	0.5 W
Light distribution	49% direct, 51% indirect
Energy efficiency	This product contains light sources of energy efficiency class c
Luminous efficiency	4366 lm
Colour rendition index	CRI Ra > 82
Light colour	Neutral white 4000 K, Nr. 47410 4 30 Warm white 3000 K, Nr. 47410 3 30
Glare suppression	Structured acrylic glass, UGR < 14
Operation	Dimmable with DALI
Materials	Lampshade in steel, powder-coated
Cover of illuminant	Structured acrylic glass
Wallcase	Contains driver
Weight	ca. 4 kg
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– Optional with a motion and daylight sensor
Note	(3000 K ca. 10 lm/W less than 4000 K)

Light intensity distribution

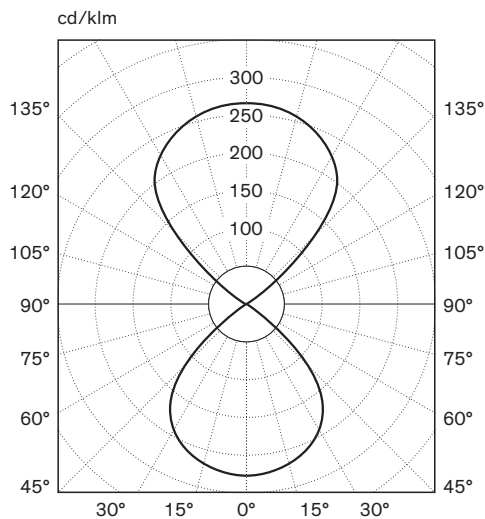

— Lateral light intensity distribution
 Frontal light intensity distribution