



Models  
Nr. 58410 4 96  
Nr. 58410 3 96

Dimensions  
Ø 898 mm  
H 52 mm

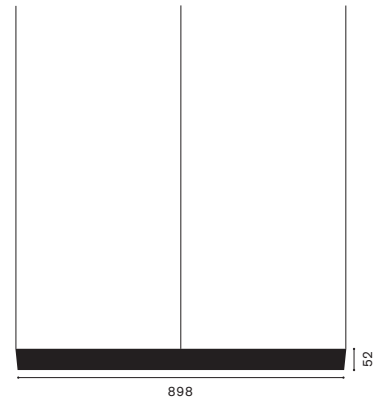

Contents	LED
Controller	ECO converter
Power requirements	220–240 V, 50 Hz
Power input	165 W
Standby	0.5 W
Light distribution	50% direct, 50% indirect
Energy efficiency	This product contains light sources of energy efficiency class c
High durability	72,000 hours
Luminous efficiency	24400 lm
Colour rendition index	CRI Ra > 83
Light colour	Neutral white 4000 K, Nr. 58410 4 96 Warm white 3000 K, Nr. 58410 3 96
Glare suppression	Structured acrylic glass, UGR < 17
Operation	Dimmable with DALI
Materials	Lampshade in steel, powder-coated
Cover of illuminant	Structured acrylic glass
Wallcase	Contains driver
Weight	ca. 15.2 kg
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– Optional with a motion and daylight sensor
Note	(3000 K ca. 10 lm/W less than 4000 K)

## Light intensity distribution

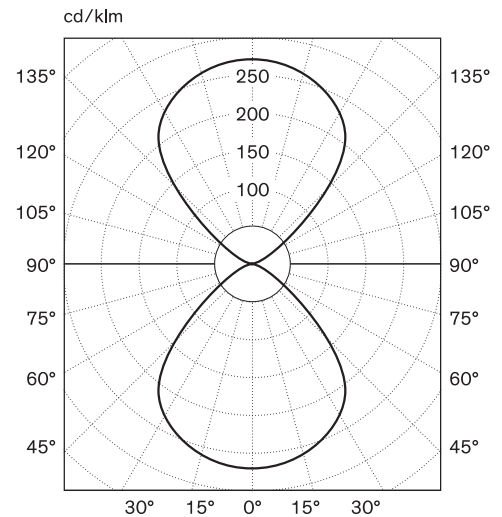

— Lateral light intensity distribution  
..... Frontal light intensity distribution