




Models Nr. 50910 4 95
Nr. 50910 3 95


Dimensions Ø 598 mm
H variable on order

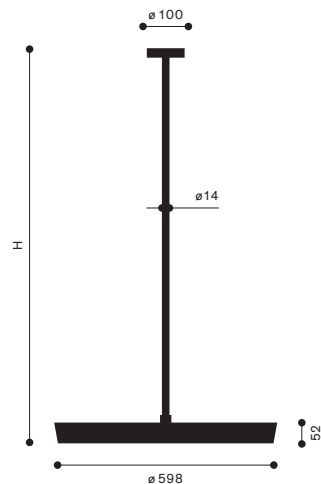

Contents	LED
Controller	Premium converter
Power requirements	220–240 V, 50 Hz
Power input	115 W
Standby	0.5 W
Light distribution	40% direct, 60% indirect
Energy efficiency	This product contains light sources of energy efficiency class c
High durability	75,000 hours
Luminous efficiency	14436 lm
Colour rendition index	CRI Ra > 94
Light colour	Neutral white 4000 K, Nr. 50910 4 95 Warm white 3000 K, Nr. 50910 3 95
Glare suppression	Structured acrylic glass, UGR < 15
Operation	Can be dimmed by DALI
Materials	Baldachin, tube and lampshade in steel, powder-coated
Cover of illuminant	Structured acrylic glass
Wallcase	Contains driver
Weight	ca. 8.2 kg
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– Optional with a motion and daylight sensor
Note	(3000 K ca. 10 lm/W less than 4000 K)

Light intensity distribution

cd/klm

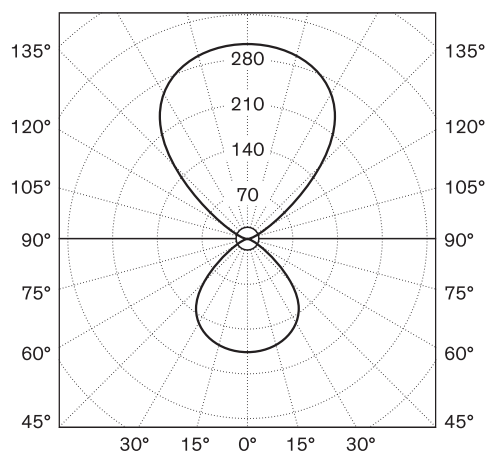

— Lateral light intensity distribution
 Frontal light intensity distribution