




Models  
Nr. 38121 4 60  
Nr. 38121 3 60

Dimensions  
H 1915 mm  
W 373 mm  
L 480 mm

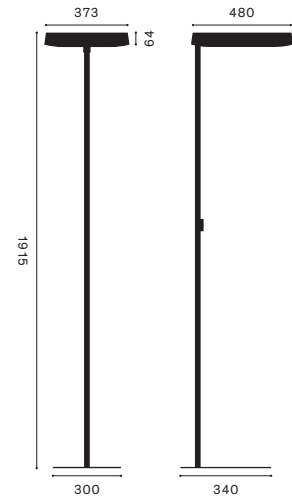

## Contents

Controller  
Power requirements  
Power input  
Standby  
Light distribution

## Energy efficiency

High durability  
Luminous efficiency  
Colour rendition index  
Light colour

## Glare suppression

## Operation

## Materials

Cover of illuminant  
Floor plate  
Weight

## Power cable

Protection rating  
Test marks  
Warranty

## Particularities

## LED

Premium converter  
220–240 V, 50–60 Hz  
67 W  
< 0.5 W  
40% direct, 60% indirect

This product contains light sources of energy efficiency class C  
72,000 hours  
9367 lm  
CRI Ra > 90  
Neutral white 4000 K, Nr. 38121 4 60  
Warm white 3000 K, Nr. 38121 3 60  
Structured acrylic glass, UGR < 13

Multi-function button for switching on and off, dimming, setting light level for version with sensor


Tube, floor plate and brim of illumination head made of metal, push-button case made of white or black powder-coated aluminium  
Structured acrylic glass  
Rectangular, glider included 9 mm high  
ca. 12.9 kg

Approx. 3 m, with power plug CH, No. XXXX1 X XX or power plug CEE 7/VII, No. XXXX2 X XX  
IP 20  
ENEC TÜV SÜD, CE, ROHS  
2 years, 5 years on LED and converter

- Only consists of 3 components and 2 screws
- Easy lamp assembly
- LED modules according to Zhaga standards

## Light intensity distribution

cd/klm

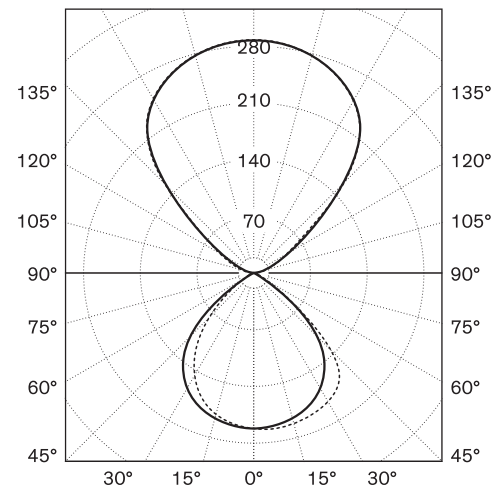

— Lateral light intensity distribution  
- - - Frontal light intensity distribution