





Models	Nr. 44710 4 45 Nr. 44710 3 45
Dimensions	H 57 mm W 99 mm L 1205 mm



Contents	LED
Controller	Premium converter, DALI
Power requirements	220–240 V, 50–60 Hz
Power input	45 W
Standby	< 0.5 W
Light distribution	100% direct
Energy efficiency	This product contains light sources of energy efficiency class c
High durability	72,000 hours
Luminous efficiency	5619 lm
Colour rendition index	CRI Ra > 83
Light colour	Neutral white 4000 K, Nr. 44710 4 45 Warm white 3000 K, Nr. 44710 3 45
Glare suppression	UGR < 19
Operation	Dimmable with DALI
Materials	Brim of illumination head made of steel, powder-coated
Cover of illuminant	Structured acrylic glass
Operating device	Included in the luminaire head
Weight	ca. 3.6 kg
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– Optionally with daylight sensor and presence detecto
Note	(3000 K ca. 10 lm/W less than at 4000 K)

Light intensity distribution
cd / klm

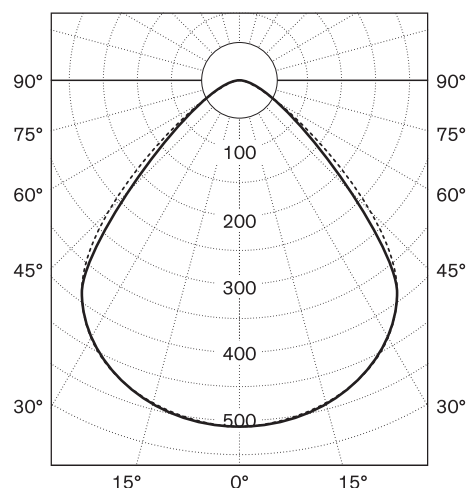

— Lateral light intensity distribution
..... Frontal light intensity distribution