





Models	Nr. 45810 4 50 Nr. 45810 3 50
Dimensions	H 57 mm W 99 mm L 1502 mm



Contents	LED
Controller	Premium converter, DALI
Power requirements	220–240 V, 50–60 Hz
Power input	52 W
Standby	< 0.5 W
Light distribution	100% direct
Energy efficiency	This product contains light sources of energy efficiency class c
High durability	72,000 hours
Luminous efficiency	5876 lm
Colour rendition index	CRI Ra > 84
Light colour	Neutral white 4000 K, Nr. 45810 4 50 Warm white 3000 K, Nr. 45810 3 50
Glare suppression	UGR < 19
Operation	Dimmable with DALI
Materials	Brim of illumination head made of steel, powder-coated
Cover of illuminant	Structured acrylic glass
Operating device	Included in the luminaire head
Weight	ca. 4.9 kg
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– 2 row Bat Wing, with anti-glare panel – Optionally with daylight sensor and presence detecto
Note	(3000 K ca. 10 lm/W less than at 4000 K)

Light intensity distribution  
cd / klm

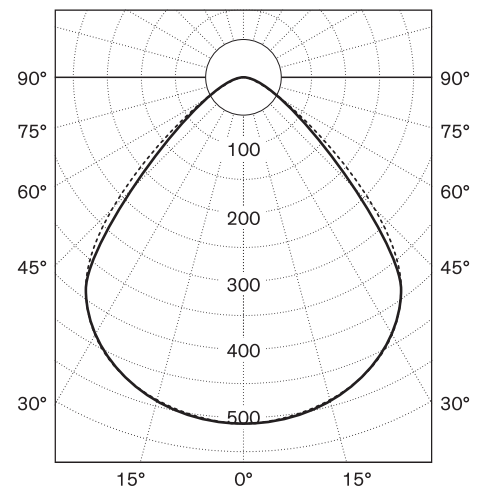

— Lateral light intensity distribution  
..... Frontal light intensity distribution