




Models	Nr. 44410 4 60 Nr. 44410 3 60
Dimensions	H 52 mm W 99 mm L 1205 mm

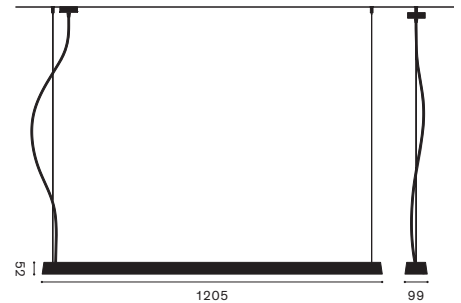

Contents

Controller
Power requirements
Power input
Standby
Light distribution

Energy efficiency
Luminous efficiency
Colour rendition index
Light colour

Glare suppression
Operation

Materials

Cover of illuminant
Weight

Power cable
Protection rating
Test marks
Warranty

Particularities

Note

LED

Premium converter, DALI
220–240 V, 50–60 Hz
68 W
< 0.5 W
48% direct, 52% indirect


This product contains light sources of energy efficiency class D
8129 lm
CRI Ra > 90
Neutral white 4000 K, Nr. 44410 4 60
Warm white 3000 K, Nr. 44410 3 60
UGR < 18
Dimmable with DALI

Brim of illumination head made of metal, powder-coated
Structured acrylic glass
ca. 3.5 kg

3 m, 5-polig
IP 20
ENEC TÜV SÜD, CE, ROHS
2 years, 5 years on LED and converter

– Optionally with daylight sensor and presence detector
(3000 K ca. 10 lm/W less than at 4000 K)

Lichtstärkenverteilung

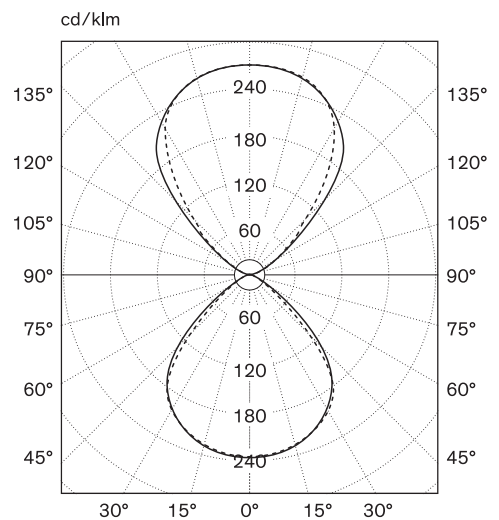

— Laterale Lichtstärkenverteilung
- - - Frontale Lichtstärkenverteilung