




Models	Nr. 45410 4 80 Nr. 45410 3 80
Dimensions	H 52 mm W 99 mm L 1502 mm

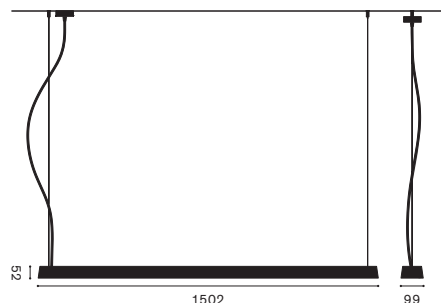

Contents	LED
Controller	Premium converter, DALI
Power requirements	220–240 V, 50–60 Hz
Power input	66 W
Standby	< 0.5 W
Light distribution	60% direct, 40% indirect
Energy efficiency	This product contains light sources of energy efficiency class c
High durability	72,000 hours
Luminous efficiency	7422 lm
Colour rendition index	CRI Ra > 82
Light colour	Neutral white 4000 K, Nr. 45410 4 65 Warm white 3000 K, Nr. 45410 3 65
Glare suppression	UGR < 17
Materials	Brim of illumination head made of steel, white powder-coated
Cover of illuminant	Structured acrylic glass
Weight	ca. 4.3 kg
Power cable	3 m, 5-polig
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– Optionally with daylight sensor and presence detector
Note	(3000 K ca. 10 lm/W less than at 4000 K)

Light intensity distribution

