




| | |
|------------|-----------------------------------|
| Models | Nr. 39161 4 97 Nr. 39161 3 97 |
| Dimensions | H 1975 mm W 408 mm L 642 mm |

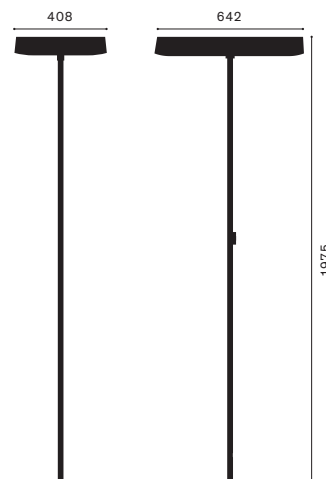

| | |
|--------------------------|---|
| Contents | LED |
| Controller | Premium converter |
| Power requirements | 220–240 V, 50 Hz |
| Power input | 132 W |
| Standby | 0.5 W |
| Light distribution | 30% direct, 70% indirect |
| Energy efficiency | This product contains light sources of energy efficiency class c |
| High durability | 72,000 hours |
| Luminous efficiency | 15462 lm |
| Colour rendition index | CRI Ra > 83 |
| Light colour | Neutral white 4000 K, Nr. 39161 4 97 Warm white 3000 K, Nr. 39161 3 97 |
| Glare suppression | UGR < 12 |
| Operation | DALI direct and indirect light can be individually switched and dimmed, with a motion and an ambient light sensor |
| Materials | Lampshade, wallcase an anti-glare grid in steel, powder-coated |
| Weight | ca. 19.4 kg |
| Protection rating | IP 20 |
| Test marks | ENEC TÜV SÜD, CE, ROHS |
| Warranty | 2 years, 5 years on LED and converter |
| Particularities | – For 2 to 4 workplaces – Double taster – With daylight sensor |
| Note | (3000 K ca. 10 lm/W less than at 4000 K) |

Light intensity distribution

