





|             |                                                       |
|-------------|-------------------------------------------------------|
| Modelle     | Nr. 700 16 4 45<br>Nr. 700 16 3 45<br>Nr. 700 16 2 45 |
| Dimensionen | Ø 1200 mm<br>H 1917 mm                                |

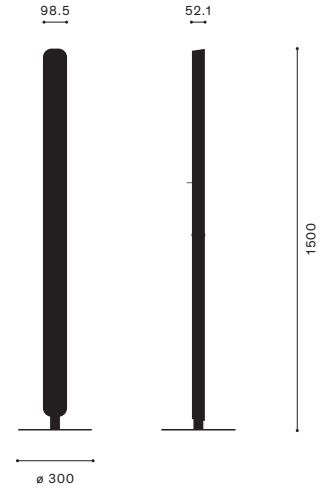

|                        |                                                                                                                         |
|------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Contents               | LED                                                                                                                     |
| Controller             | Premium converter                                                                                                       |
| Power requirements     | 220–240 V, 50 Hz                                                                                                        |
| Power input            | 48 W                                                                                                                    |
| Standby                | 0.5 W                                                                                                                   |
| Light distribution     | 55% direct, 45% indirect                                                                                                |
| Energy class lamp      | This product contains light source of energy efficiency class D                                                         |
| High durability        | 72,000 hours                                                                                                            |
| Luminous efficiency    | 3566 lm                                                                                                                 |
| Colour rendition index | CRI Ra > 92                                                                                                             |
| Light colour           | Neutral white 4000 K, Nr. 700 16 4 45<br>Warm white 3000 K, Nr. 700 16 3 45<br>Extra warm white 2700 K, Nr. 700 16 2 45 |
| Glare suppression      | Structured acrylic glass, UGR < 15                                                                                      |
| Operation              | Über Bodentaster dimmbar                                                                                                |
| Materials              | floor plate and lampshade in steel, powder-coated                                                                       |
| Cover of illuminant    | Structured acrylic glass                                                                                                |
| Wallcase               | Contains driver                                                                                                         |
| Weight                 | ca. 9.3 kg                                                                                                              |
| Protection rating      | IP 20                                                                                                                   |
| Test marks             | ENEC TÜV SÜD, CE, ROHS                                                                                                  |
| Warranty               | 2 years, 5 years on LED and converter                                                                                   |
| Particularities        | – vertical and 360° rotatable lamp head<br>– radiating in two directions<br>– Colour according to order                 |
| Notes                  |                                                                                                                         |

## Light intensity distribution

cd/klm

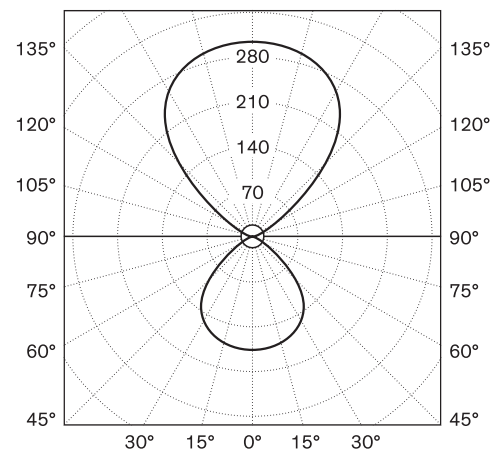

— Lateral light intensity distribution  
- - - Frontal light intensity distribution