



Models	Nr. 720 16 4 75 Nr. 720 16 3 75
Dimensions	L 1200 mm H 1930 mm

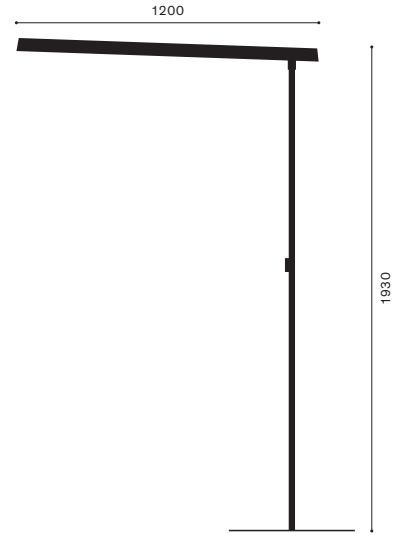

Contents	LED
Controller	Premium converter
Power requirements	220–240 V, 50 Hz
Power input	65 W
Standby	0.5 W
Light distribution	60% direct, 40% indirect
Energy class lamp	This product contains light sources of energy efficiency class C
High durability	72,000 hours
Luminous efficiency	7497 lm
Colour rendition index	CRI Ra > 92
Light colour	Neutral white 4000 K, Nr. 720 16 4 75 Warm white 3000 K, Nr. 720 16 3 75
Glare suppression	Structured acrylic glass, UGR < 18
Operation	Dimmable with Taster
Materials	Tube, floor plate and lampshade in steel, powder-coated
Cover of illuminant	Structured acrylic glass
Wallcase	Contains driver
Weight	ca. 15.6 kg
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– with a rotatable lamp head – Optionally with daylight sensor and presence detector F S – Colour according to order
Notes	(3000 K ca. 10 lm/W less than 4000 K)

Light intensity distribution

cd/klm

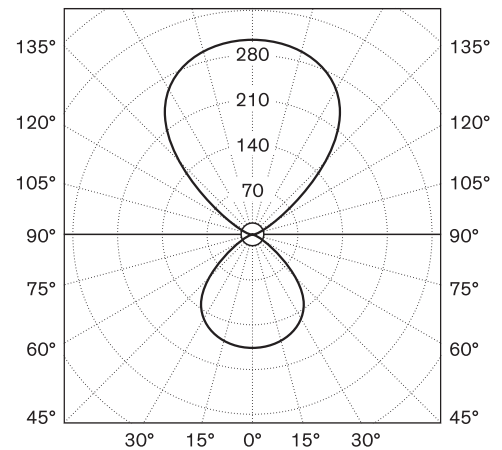

— Lateral light intensity distribution
- - - Frontal light intensity distribution