



Models	Nr. 44510 4 40 Nr. 44410 3 40
Dimensions	H 52 mm W 99 mm L 1205 mm

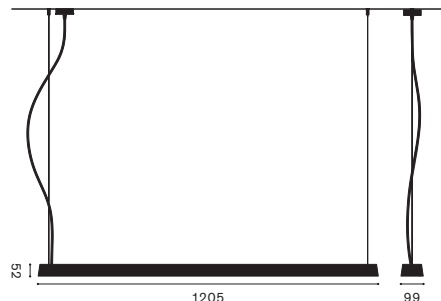

Contents	LED
Controller	Premium converter, DALI
Power requirements	220–240 V, 50–60 Hz
Power input	37 W
Standby	< 0.5 W
Light distribution	59% direct, 41% indirect
Energy efficiency	This product contains light sources of energy efficiency class C
Luminous efficiency	4395 lm
Colour rendition index	CRI Ra > 83
Light colour	Neutral white 4000 K, Nr. 44510 4 40 Warm white 3000 K, Nr. 44510 3 40
Glare suppression	UGR < 16
Operation	Dimmable with DALI
Materials	Brim of illumination head made of steel, powder-coated
Cover of illuminant	Structured acrylic glass
Weight	ca. 3.5 kg
Power cable	3 m, 5-polig
Protection rating	IP 20
Test marks	ENEC TÜV SÜD, CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– Optionally with daylight sensor and presence detector
Note	(3000 K ca. 10 lm/W less than at 4000 K)

Light intensity distribution
cd / klm

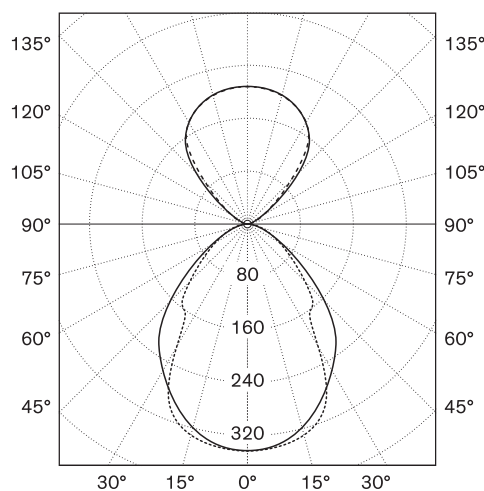

— Lateral light intensity distribution
- - - - Frontal light intensity distribution