





Models	Nr. 58016 4 96 Nr. 58016 3 96
Dimensions	Ø 898 mm H 2150 mm

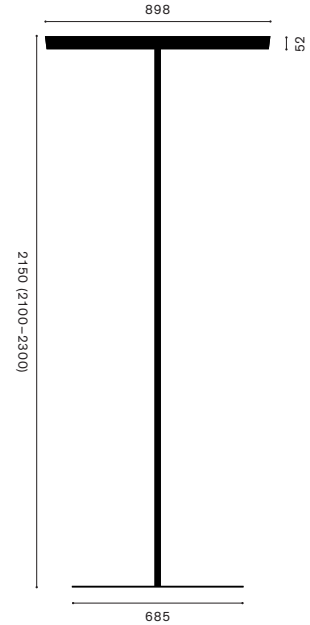

Contents	LED
Controller	Premium converter
Power requirements	220–240 V, 50 Hz
Power input	165 W
Standby	0.5 W
Light distribution	50% direct, 50% indirect
Energy efficiency	This product contains light sources of energy efficiency class C
High durability	72.000 hours
Luminous efficiency	23000 lm
Colour rendition index	CRI Ra > 83
Light colour	Neutral white 4000 K, Nr. 85016 4 96 Warm white 3000 K, Nr. 85016 3 96
Glare suppression	Structured acrylic glass, UGR < 18
Operation	by „Casambi“
Materials	Tube, floor plate and lampshade in steel, powder-coated
Cover of illuminant	Structured acrylic glass
Wallcase	Contains driver
Weight	ca. 49 kg
Protection rating	IP 20
Test marks	CE, ROHS
Warranty	2 years, 5 years on LED and converter
Particularities	– Optional with a motion and daylight sensor – Optional another height to 2300mm – Optional Luminous efficiency to 36256lm
Note	(3000 K ca. 10 lm/W less than 4000 K)

Light intensity distribution

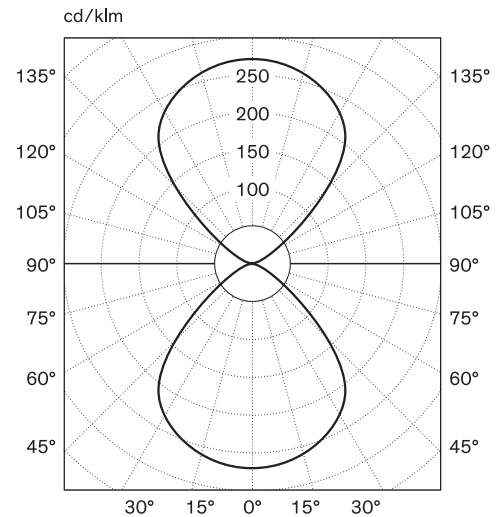

— Lateral light intensity distribution  
- - - - Frontal light intensity distribution