



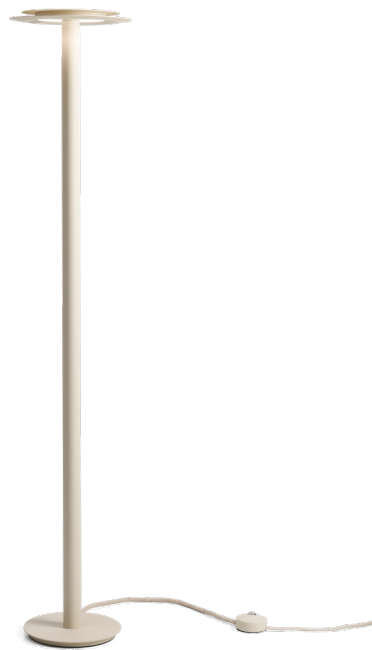

Dimensions

Head Ø 274 mm
Foot Ø 196 mm
Pipe Ø 40 mm
Height 1395 mm

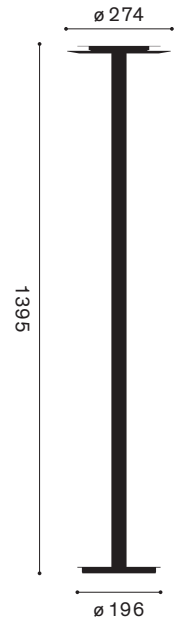

Contents

Controller
Power requirements
Power input
Standby
Light distribution

Energy efficiency

High Durability
Luminous efficiency
Colour rendition index
Light colour/
Model No.

Operation

Materials
Cover of illuminant
Driver
Weight

Protection rating
Test marks
Warranty

Productdesign

LED

Premium converter
220-240 V, 50 Hz
28 W
>0.5 W
85% direct, 15% indirect

This product contains light sources of energy efficiency class C

60.000 hours
2539 lm
CRI Ra>90
neutral white 4000 K, Nr. 94306 4 30
warm white 3000 K, Nr. 94306 3 30
Extra warm white 2700 K, Nr. 94306 2 30

ON/OFF, dimmable with the floor button


Luminaire head in metal, powder-coated
PMMA
in tube
ca. 21 kg

IP 20
CE, ROHS
2 years, 5 years on LED and converter

GLARONA collection
Design Jörg Boner productdesign

Light intensity distribution

cd/klm

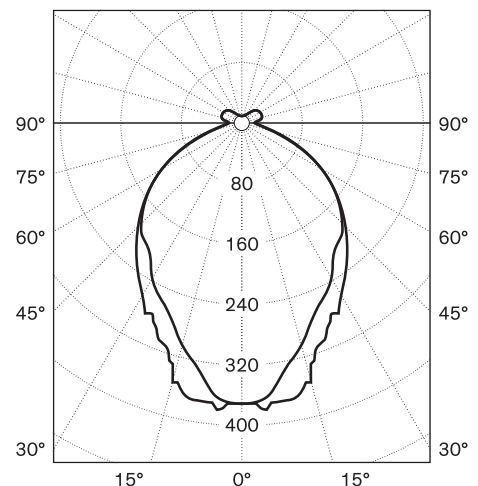

— Lateral light intensity distribution
..... Frontal light intensity distribution